



IM Hart AB

Machinery for the Pallet Industry

BMRA-1000	
Machine specification facts.	Standard performance
IM Hart machine deliveries. All machines are delivered according to CE Certification and complete documentation for Electricity, Hydraulics and pneumatics all according to European standard	
Operators	
Length	4,3m
Width	2,3m
Height	1,0m
Power: Requires	10kw
Pneumatic system	7 bar compressed dried air: 200 L/min.
Should be filled and controlled	Container for lubricating oil Compressor not included
Hydraulic system	Non hydraulic components
Machine capacity time	4 complete pallets /min (800x1200)
Standard equipment	6 ea. Branding units, 3 ea. Heating sticks/ unit
Outgoing additional options	Any kind of after treatment machine Turner stacker, Etc. Chain conveyor

Material: Pallets	Sollid wood	
Leg board size	Minimum	Maximum
Length	600mm	1600 mm
Width	75mm	150 mm
Thickness	16mm	28 mm
Pallet size	Minimum	Maximum
Length deck & legs	600 mm	1600 mm
Width deck	600 mm	1400 mm
Width wing with a minimum block hight of 75 mm		+50

**IM HART AB
KOPPARBERG
SWEDEN**

info@imhart.com


+46 (0) 580 293 20

www.imhart.com



BRANDING MACHINE BMRA-1000

The after treatment machine

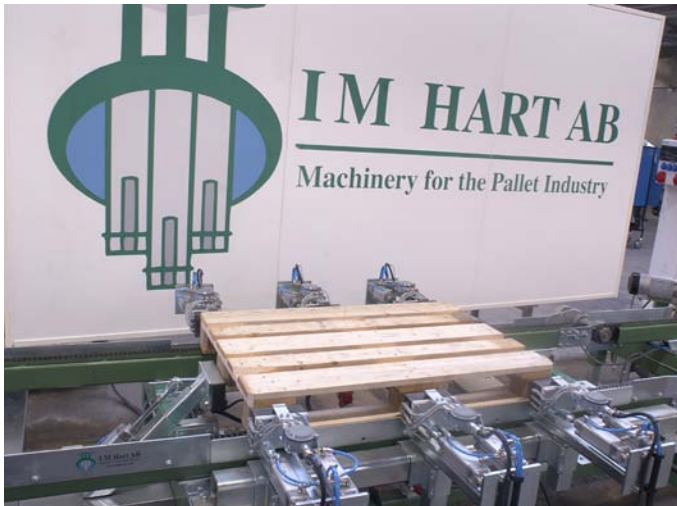

A fast working machine with a smart construction that is very simple to handle and adjust. Variable adjustment of heat and burning time, to achieve the absolute best results on different kind of material circumstances

**Automatically
BMRA-1000 is used automatic in a
after treatment line**

**Adjust in to what the pallet specification requires and choose where to brand the pallet. EUR mark, logo or a text.
Interchangeable matrix that is very easy to replace.**

Choose the pallet size and BMRA-1000 brand the pallet on 2, 4 or 6 places at the same time

**Fast motorized adjustment when changing to a new pallet size.
Branding units are manually adjusted for precision burn marking.**

For a precise marking, there are individual adjustment possibilities in length.

